



# Technical Application LUZON Panel Light

LUZ-PL2X2-40W  
LUZ-PL2X2-40WD

# Introduction



LUZON troffer adopts LM-80 SMD led chip, with UL&cUL, DLC approved for North America market. 1X4, 2X2, 2X4 sizes are available for various demand. Branded led driver with top quality component ensures long life time. 0-10V dimmable and non-dimmable version both provided.

The ultra slim profile fits seamlessly into any workplace. It is available in the following installation ways: embedded into ceiling, suspended with hanging wires.

- Up to 80% energy saving compared to standard CFL
- Long lifetime of 50,000 hours
- 0-10V dimmable
- 120° wide beam angle
- CCT: 2700K 3000K  
4000K 5000K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

## Application notes

- IP40 for indoor use
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas



## Application Areas

Widely used for various commercial lighting and residential lighting applications, such as offices, shopping mall, hotel, restaurant, hospital, home lighting etc.

## Certificates



# Product Information

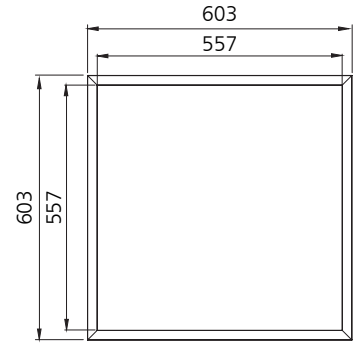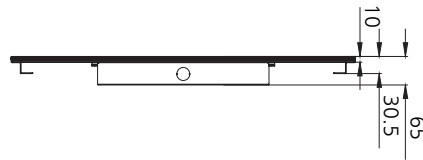

## Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
LUZ-PL2X2-40W	AC100-277V	40W	≥0.9	3400	120°	2700K	50000h	≥80	No	603*603*10mm
LUZ-PL2X2-40W	AC100-277V	40W	≥0.9	3440	120°	3000K	50000h	≥80	No	603*603*10mm
LUZ-PL2X2-40W	AC100-277V	40W	≥0.9	3480	120°	4000K	50000h	≥80	No	603*603*10mm
LUZ-PL2X2-40W	AC100-277V	40W	≥0.9	3520	120°	5000K	50000h	≥80	No	603*603*10mm
LUZ-PL2X2-40WD	AC100-277V	40W	≥0.9	3480	120°	2700K	50000h	≥80	Yes	603*603*10mm
LUZ-PL2X2-40WD	AC100-277V	40W	≥0.9	3520	120°	3000K	50000h	≥80	Yes	603*603*10mm
LUZ-PL2X2-40WD	AC100-277V	40W	≥0.9	3560	120°	4000K	50000h	≥80	Yes	603*603*10mm
LUZ-PL2X2-40WD	AC100-277V	40W	≥0.9	3600	120°	5000K	50000h	≥80	Yes	603*603*10mm





## Driver data Sheet

Driver data	DIM	Non-dim
Input rated Voltage	AC100-277V	AC100-277V
Frequency	50/60Hz	50/60Hz
Input Voltage	AC90-305V	AC90-305V
Efficiency	≥85%	≥85%
Total load Wattage	36W±5%	40W±5%
Power Factor	≥0.9	≥0.9
Rated input current	≤0.4A	≤0.5A
Full load output Voltage	DC23-26V	DC23-26V
Rated output current	1400mA	1400mA
Output current range	1400mA±5%	1400mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	1%-100%	—
Dimmer	0V-10V dimmer	—
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





## Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
40W	II	IP40	-20°C~45°C	0~90%	-20°C~65°C


# Spectral Distribution

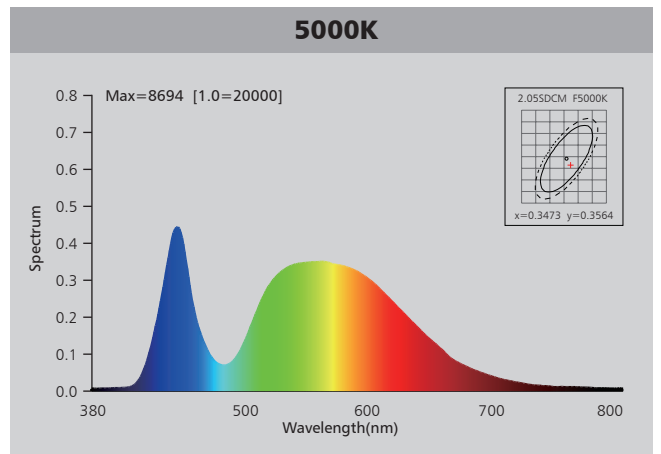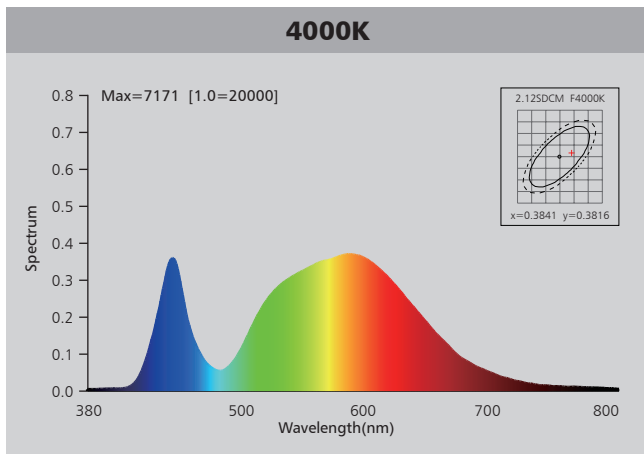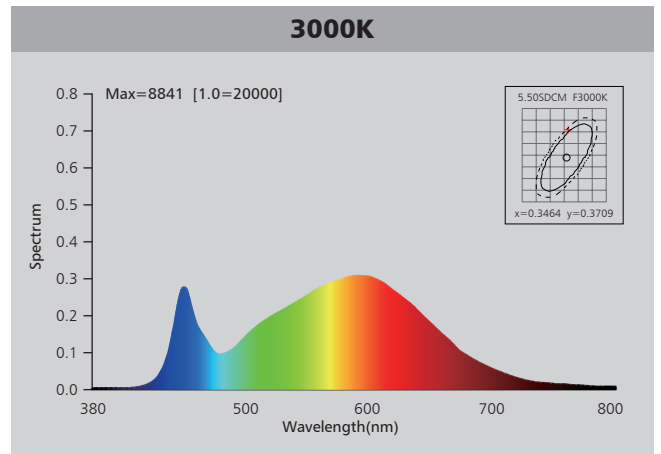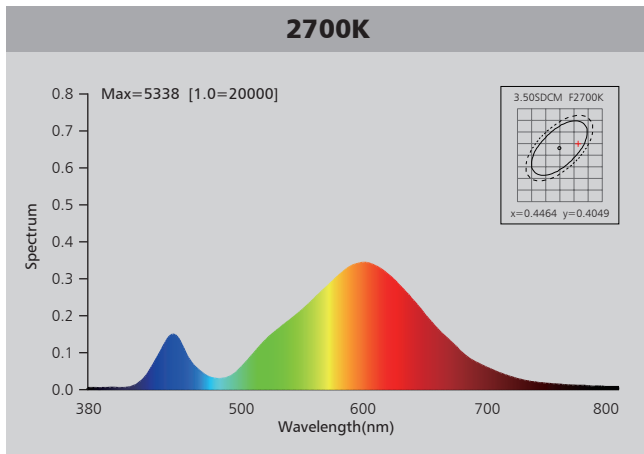


# Photometric Diagram

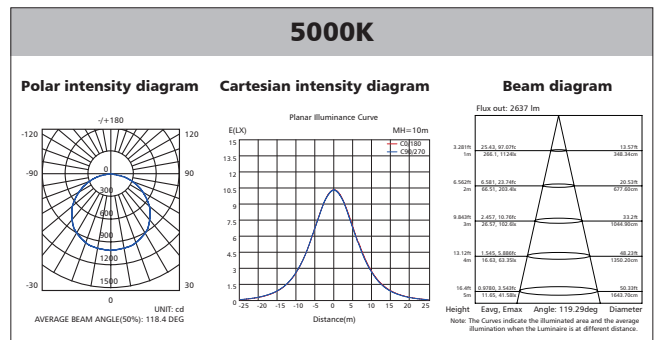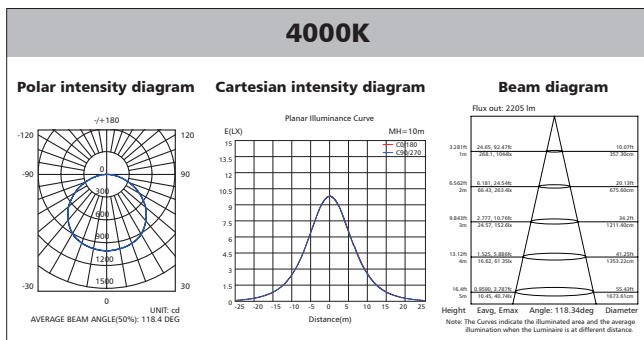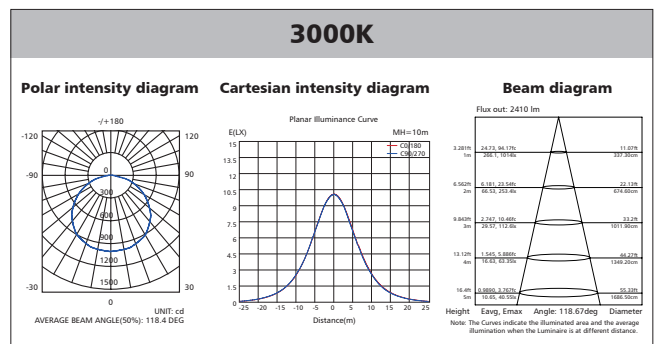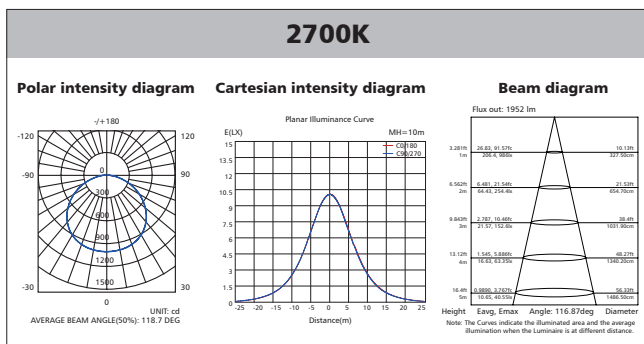



## Polar Diagram Comparison

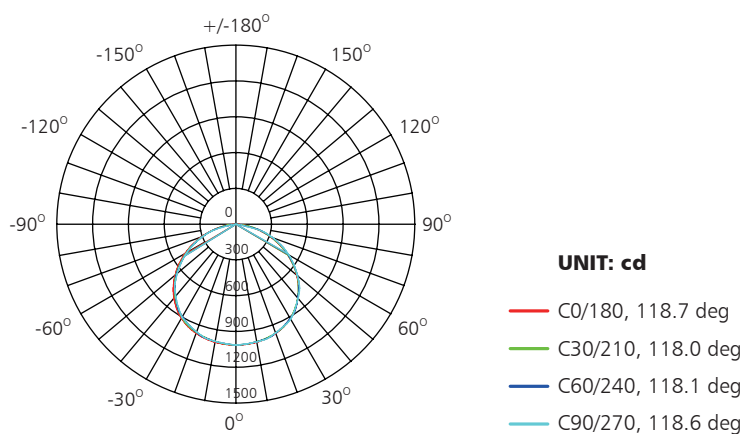

AVERAGE BEAM ANGLE (50%): 118.4DEG

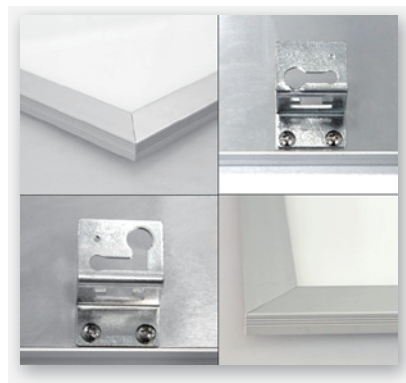


## Driver lifetime & LED light decay rate

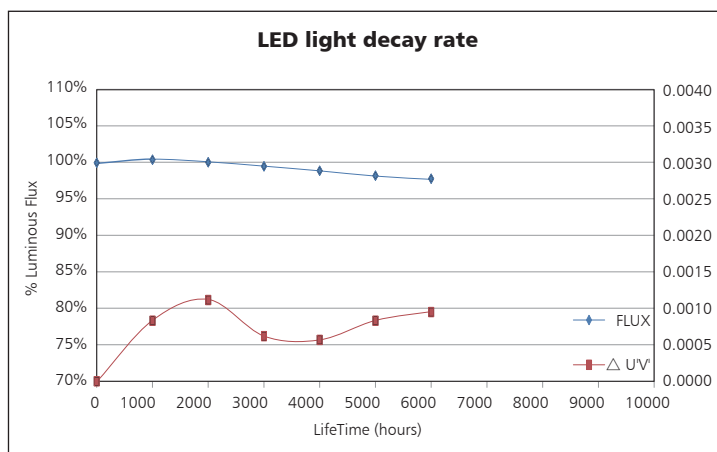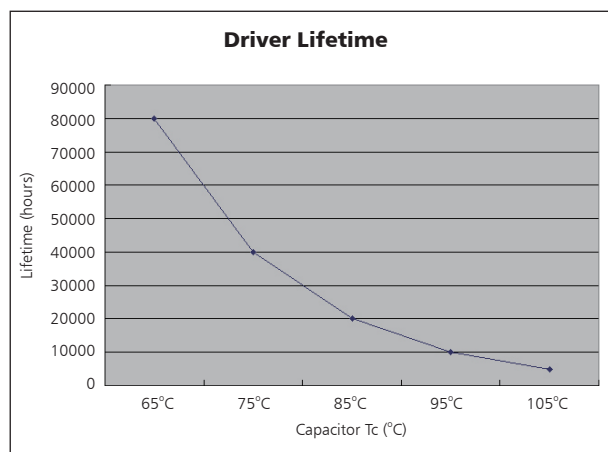

## Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

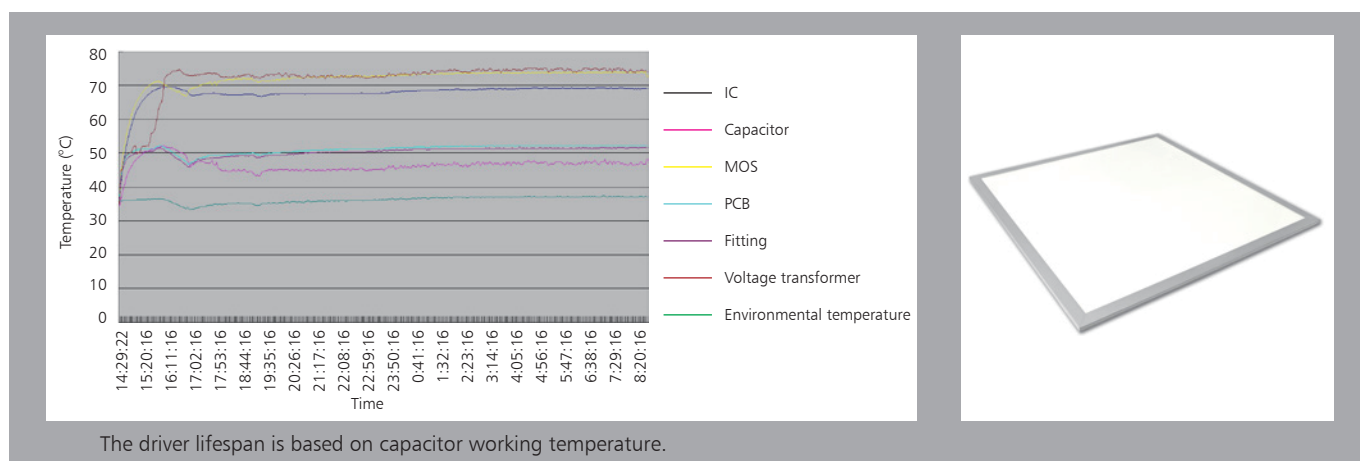

# Installation

**1. Recessed into ceiling**

1. Remove ceiling plaster slab
2. Connect power supply
3. Fix the panel light into right place
4. Stabilize the panel

**2. Suspending**

1. A. Fix the anchor into target place on the ceiling  
B. Fix the installation mount on the ceiling with plastic anchor
2. Hang the panel to ceiling with suspended installation kits
3. Adjust the length of steel wire. Connect the power supply

**3. Surface mounted**

1. Unpack box and take out aluminum profile A - 2 pcs, aluminum profile B - 2 pcs, as well as accessory pack.
2. Assembling 3 pieces aluminum profile together with screw.
3. Fix semi-finished frame onto ceiling with screw (Concrete ceiling requires plastic anchor)
4. Slide panel into frame properly.
5. Fix the last piece of aluminum profile with screw after panel is well placed.

# Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	67*31*67.5	4.8	25.5	4

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	195	780	28
40" standard container	390	1560	56

