



Technical Application

LED Downlight

LUZ-DL22-6-25W

# Introduction



COB downlight is unique designed with reflector and COB high power LED chip. AL6063 Aluminum profile provides excellent thermal dissipation. Short heatsink designed for any ceiling installations. Isolated driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with worldwide brand dimmers.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Triac dim, 0-10V dim, DALI dim
- 60°wide beam angle
- 160-170mm cutout
- CCT: 3000K 4000K  
5000K 5700K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

## Application notes

- IP20/IP44 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

## Application Areas

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.



## Certificate



**RoHS**



# Product Information

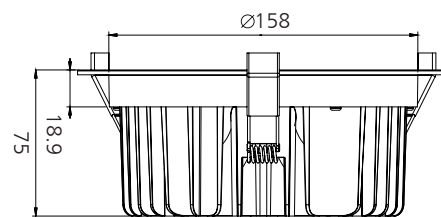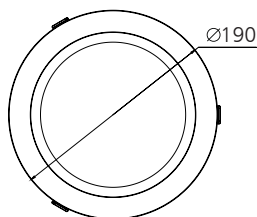

## Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
LUZ-DL22-6-25W	AC100-240V	25W	≥0.9	1830	60°	3000K	40000h	≥80	No	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25W	AC100-240V	25W	≥0.9	1840	60°	4000K	40000h	≥80	No	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25W	AC100-240V	25W	≥0.9	1850	60°	5000K	40000h	≥80	No	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25W	AC100-240V	25W	≥0.9	1870	60°	5700K	40000h	≥80	No	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25WD	AC230V	25W	≥0.9	1750	60°	3000K	40000h	≥80	Yes	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25WD	AC230V	25W	≥0.9	1780	60°	4000K	40000h	≥80	Yes	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25WD	AC230V	25W	≥0.9	1800	60°	5000K	40000h	≥80	Yes	Ø190*75mm cutout 160-170mm
LUZ-DL22-6-25WD	AC230V	25W	≥0.9	1820	60°	5700K	40000h	≥80	Yes	Ø190*75mm cutout 160-170mm





## Driver data Sheet

Driver data	DIM	Non dim
Input rated Voltage	AC230V	AC100-240V
Frequency	50Hz	50/60Hz
Input Voltage	AC200-240V	AC85-265V
Efficiency	≥85%	≥87%
Total load Wattage	25W±5%	25W±5%
Power Factor	≥0.9	≥0.9
Rated input current	≤0.13A	≤0.28A
Full load output Voltage	DC29-33V	DC29-33V
Rated output current	700mA	700mA
Output current range	700mA±5%	700mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	——
Dimmer	Triac dimmers	——
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





## Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
25W	II	IP20/IP44	-20°C~45°C	0~90%	-20°C~65°C


# Spectral Distribution

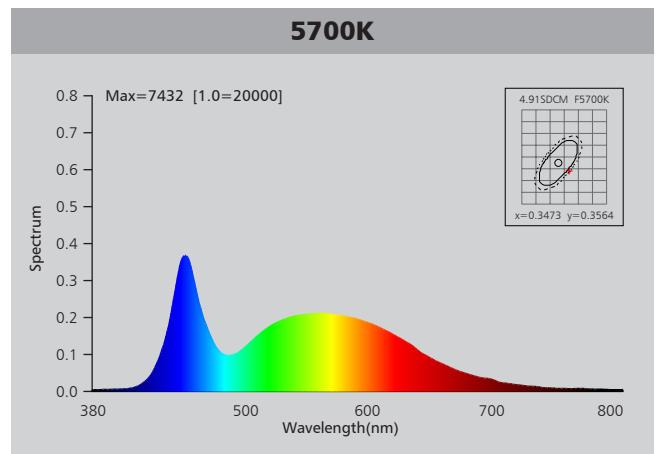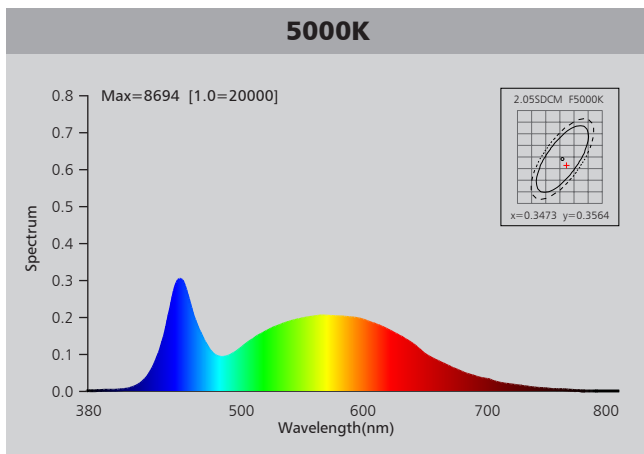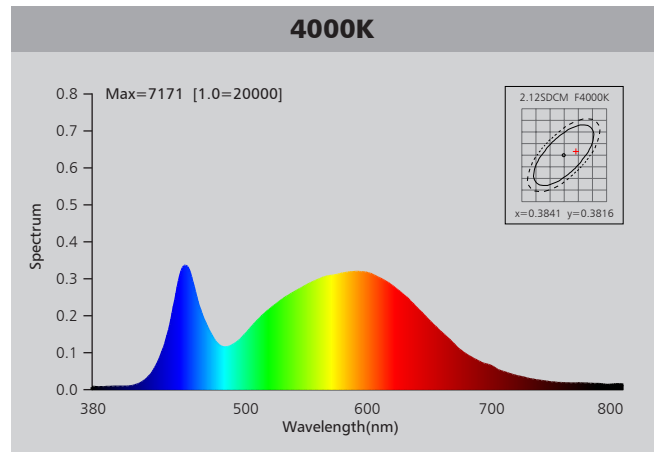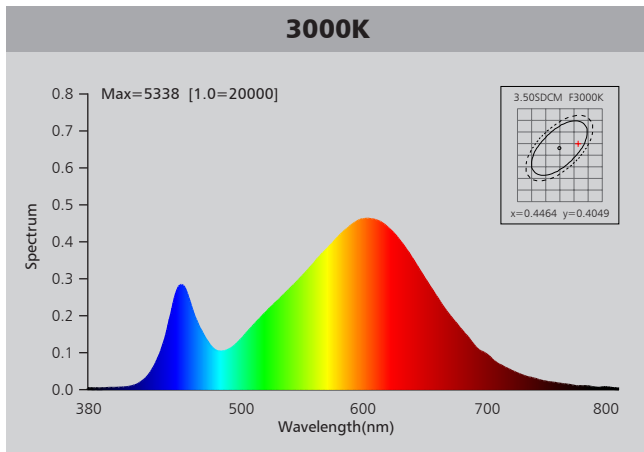

# Photometric Diagram

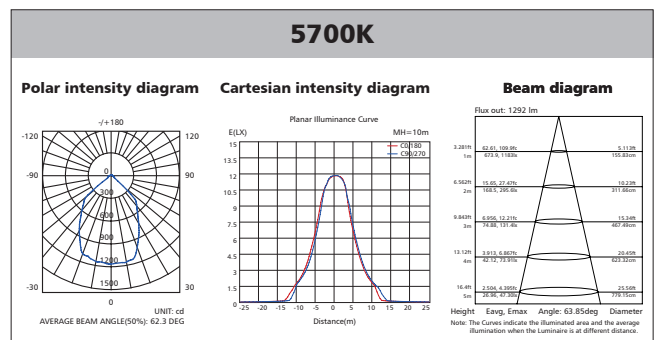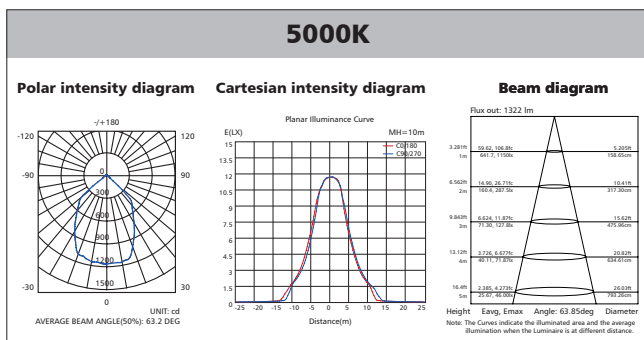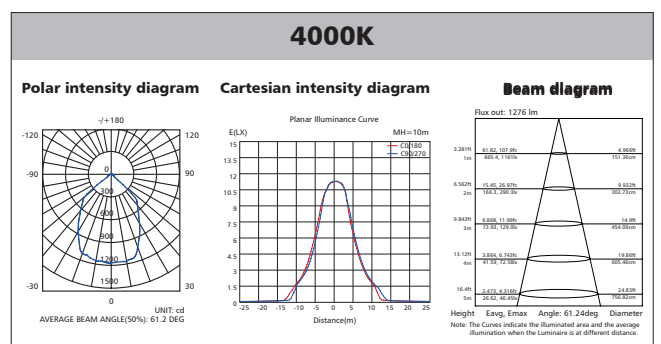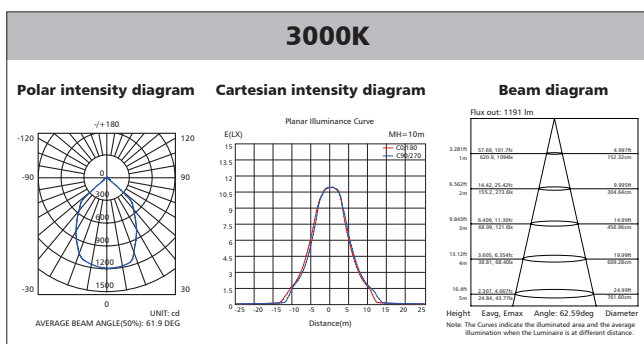



## Polar Diagram Comparison

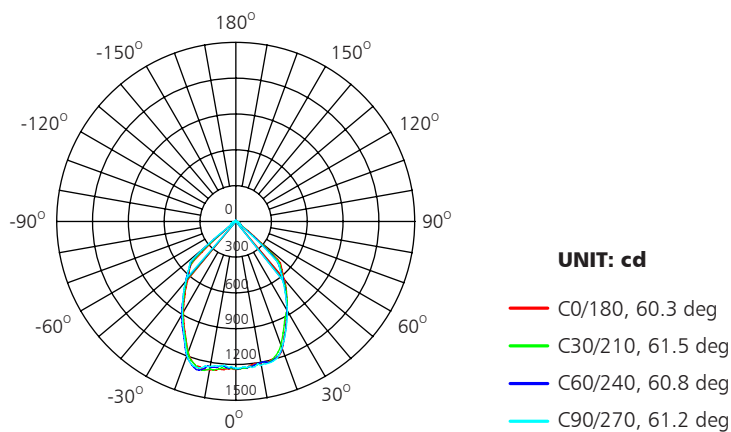

AVERAGE BEAM ANGLE (50%): 61.2DEG




## Driver lifetime & LED light decay rate

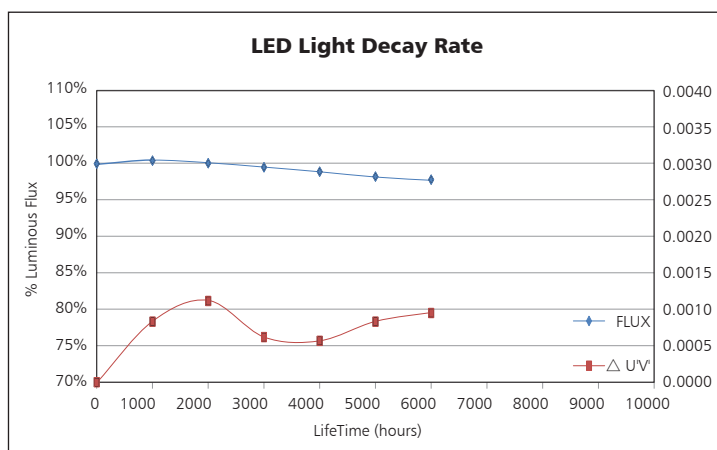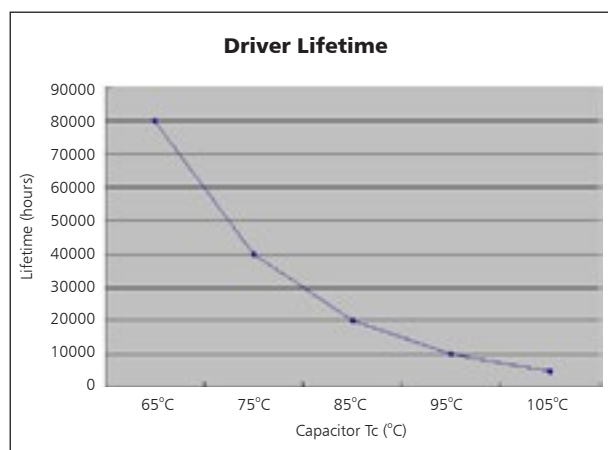

## Temperature


- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

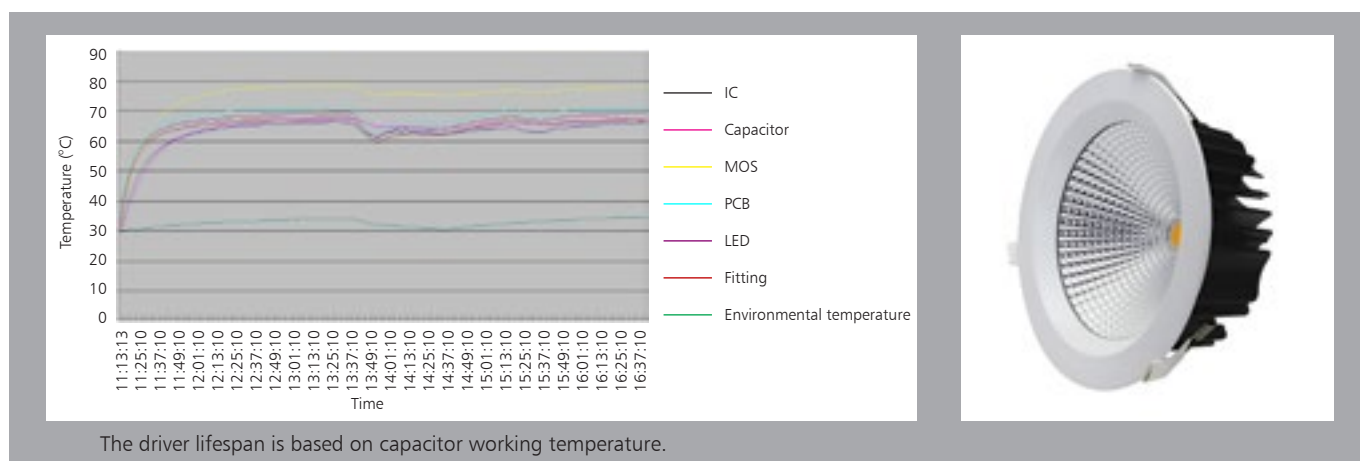

The driver lifespan is based on capacitor working temperature.

# Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

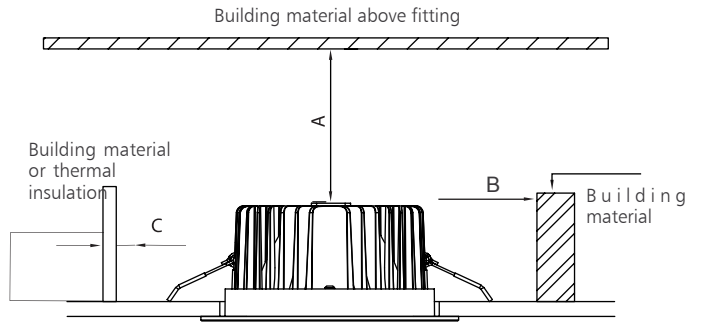

<p><b>Ceiling Opening Ø160-170mm</b></p> <p style="text-align: right;">1</p>	<p><b>Connect Power supply</b></p> <p style="text-align: right;">2</p>
<p><b>A. Hold back spring clips</b></p> <p><b>B. Push downlight into position</b></p> <p style="text-align: right;">3</p>	<p><b>Finish</b></p> <p style="text-align: right;">4</p>

# Packaging Information

	SIZE(CM)	N.W./pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	66*46*27	1.42	18	12

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	340	1080	28
40" standard container	680	8160	56

