

luzon
lighting™



Technical Application
LED Scoop Downlight
LUZ-DL77-2.5-10W

Introduction



↻ 350°

↕ 35°

COB downlight is unique designed with reflector and Citizen COB high power LED chip. ADC12 die-casting aluminium profile provides excellent thermal dissipation. Adjustable lighting direction provides all possible lighting effects. Isolated driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with worldwide brand dimmers.

- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using triac dimmer
- 15°/24° wide beam angle
- Ø85-90mm cutout
- CCT: 2700K 3000K
4000K 5000K
- No UV/IR light
- Environment friendly, without Mercury or any other hazardous substances

Application notes

- IP20 for indoor use only
- Professional electrician for installation only
- Switch off before installation
- Do not touch when in use
- Keep away from hot steam and corrosive gas

Application Areas


It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Certificate

CE RoHS



Product Information

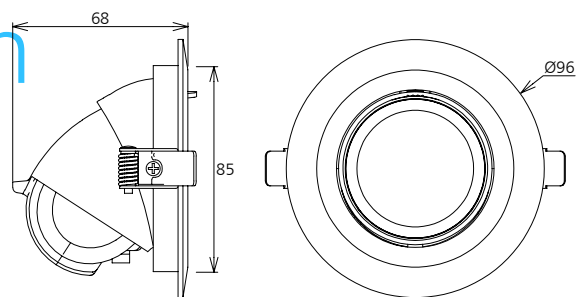

Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	Lifespan	CRI	Dimmable	Dimension
LUZ-DL77-2.5-10W	AC230V	10W	≥0.9	720	15°/24°	2700K	40000h	≥80	No	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W	AC230V	10W	≥0.9	750	15°/24°	3000K	40000h	≥80	No	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W	AC230V	10W	≥0.9	800	15°/24°	4000K	40000h	≥80	No	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W	AC230V	10W	≥0.9	780	15°/24°	5000K	40000h	≥80	No	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W-D	AC230V	10W	≥0.9	700	15°/24°	2700K	40000h	≥80	Yes	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W-D	AC230V	10W	≥0.9	730	15°/24°	3000K	40000h	≥80	Yes	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W-D	AC230V	10W	≥0.9	770	15°/24°	4000K	40000h	≥80	Yes	Ø96*68mm cutout Ø85-90mm
LUZ-DL77-2.5-10W-D	AC230V	10W	≥0.9	750	15°/24°	5000K	40000h	≥80	Yes	Ø96*68mm cutout Ø85-90mm





Driver data Sheet

Driver data	DIM	Non dim
Input rated Voltage	AC230V	AC230V
Frequency	50Hz	50Hz
Input Voltage	AC200-240V	AC200-240V
Efficiency	≥78%	≥82%
Total load Wattage	10W±1W	10W±1W
Power Factor	≥0.9	≥0.9
Rated input current	≤0.06A	≤0.06A
Full load output Voltage	DC23-40V	DC27-42V
Rated output current	215mA	230mA
Output current range	215mA±5%	230mA±5%
Power tolerance	±5%	±5%
Current output tolerance	±5%	±5%
Dimming range	8%-100%	—
Dimmer	Triac dimmers	—
THD	<18%	<18%
Short circuit protection	PASS	PASS
Over voltage protection	PASS	PASS
Over temperature protection	PASS	PASS
Withstand voltage	AC3750V	AC3750V





Fixture Compatibility

Rated Wattage	Electrical Classification	Ingress Protection	Operating Temp	Operating Humidity	Storage Temp
10W	II	IP20	-20°C~45°C	0~90%	-20°C~65°C


Spectral Distribution

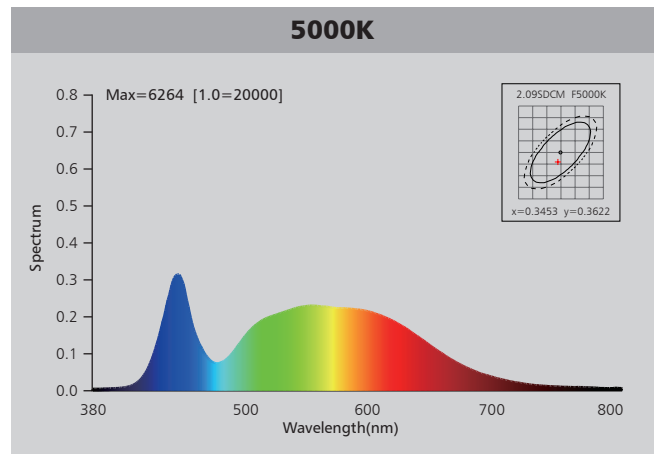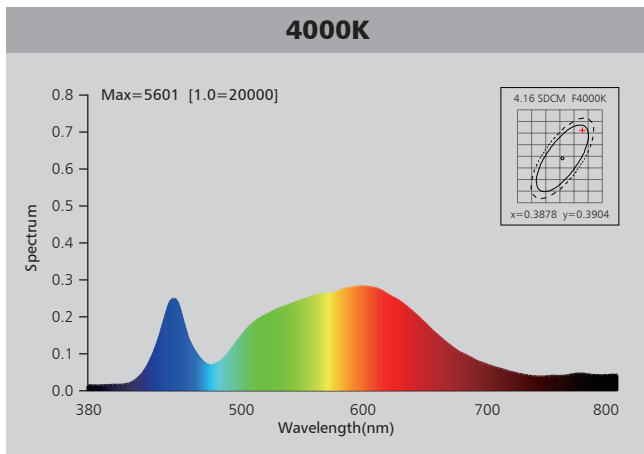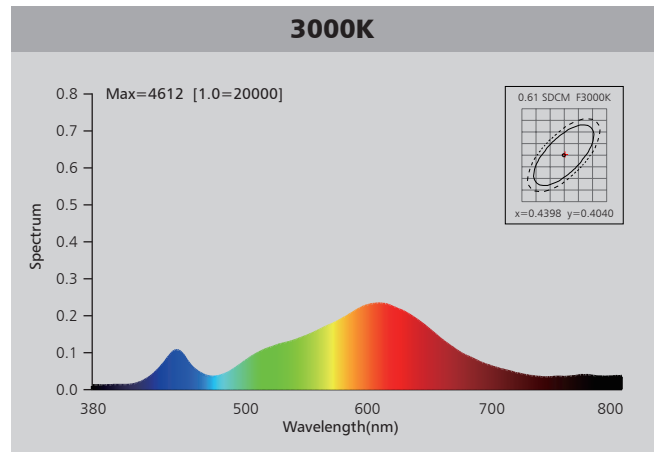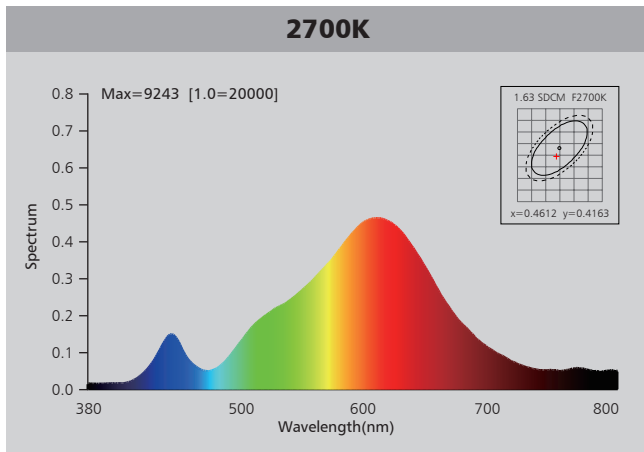

Photometric Diagram

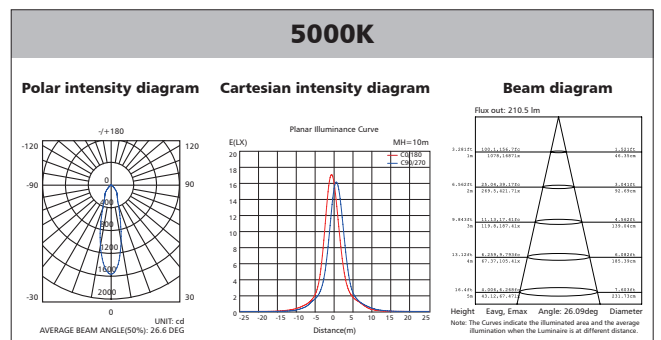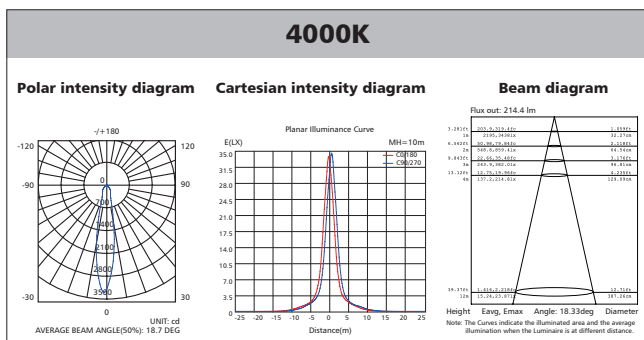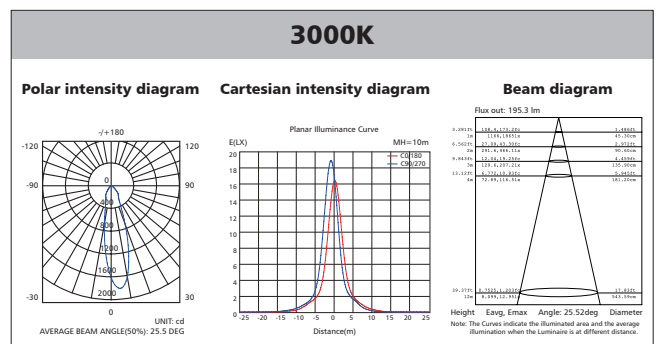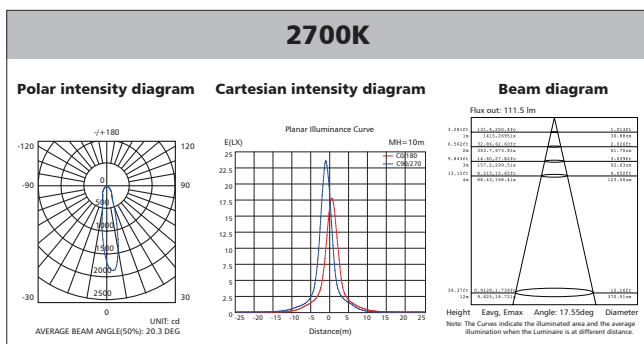



Polar Diagram Comparison

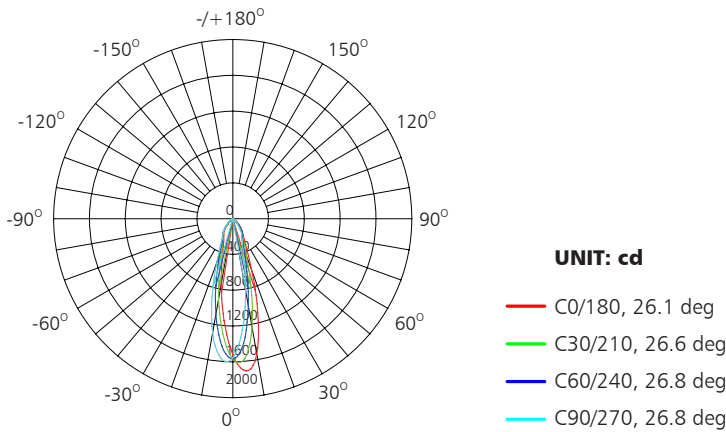

AVERAGE BEAM ANGLE (50%): 26.6DEG




Driver lifetime & LED light decay rate

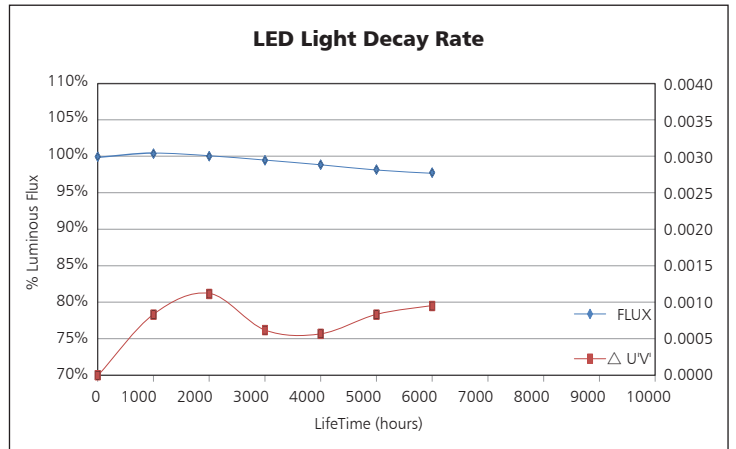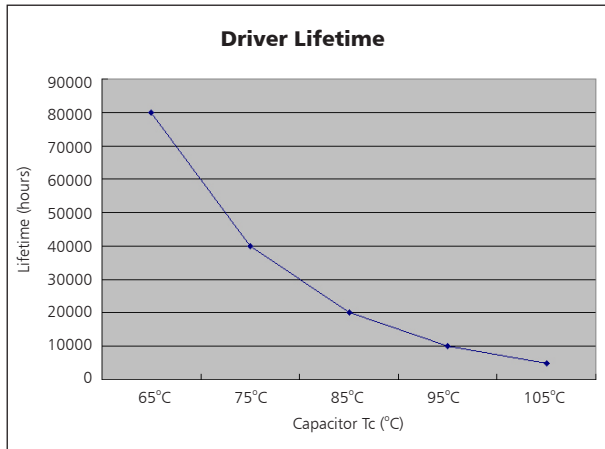


Temperature

- The testing is operated at 25°C
- The lifetime of capacitor, minimum of 5,000 hours if operated at 105°C, will be doubled whenever the temperature drops 10°C
- The highest withstand temperature of IC, MOS could be 120°C
- The highest withstand temperature of LED junction temperature is 150°C

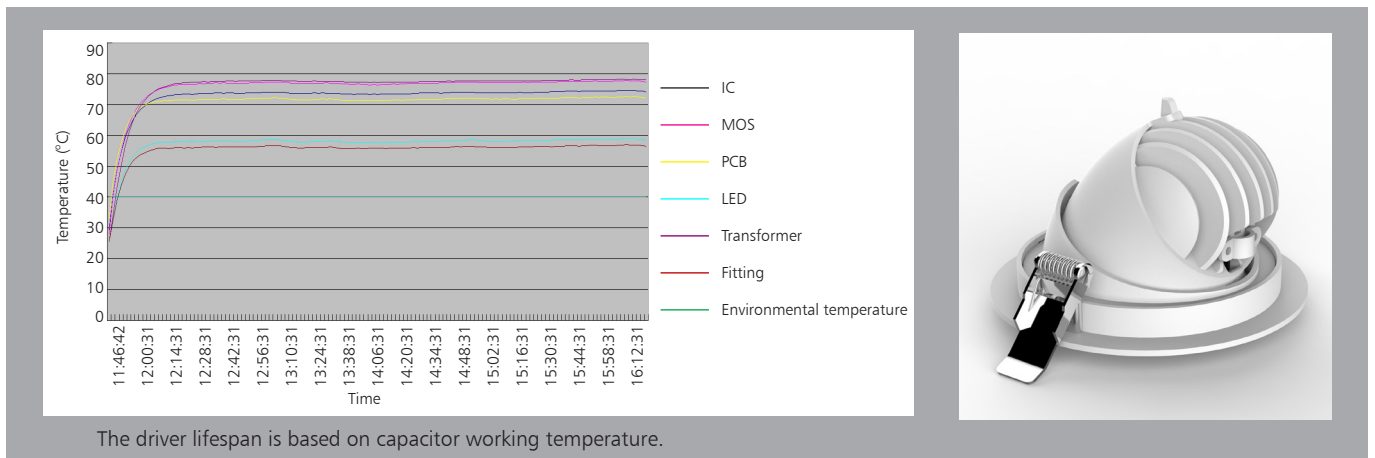

Installation

Install requirements	
A-gap above the fitting	25mm
B-gap to the building material	25mm
C-gap to the thermal insulation	25mm

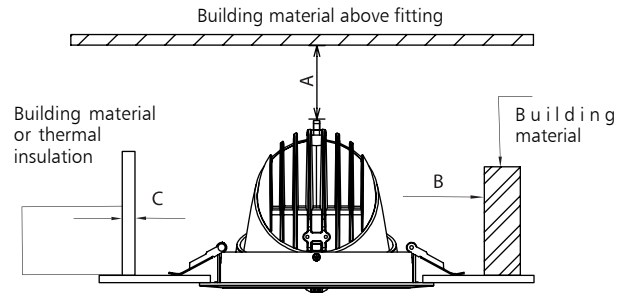

<p>Ceiling Opening</p> <p>1</p>	<p>Connect Power supply</p> <p>2</p>
<p>A. Hold back spring clips</p> <p>B. Push downlight into position</p> <p>3</p>	<p>Spring Clips</p> <p>Finish</p> <p>Ceiling</p> <p>4</p>

Packaging Information

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	Q'TY(PCS)
Carton	43.5*33*29	0.25	12.3	36

	CTNS	Q'TY(PCS)	VOLUME(CBM)
20" standard container	656	23616	28
40" standard container	1312	47232	56

